


# A-60 HINGED DOORS, DOUBLE-LEAF, screw fastening frame U-profile


Thickness of the doorleaf	Fire class
62mm	A60

Lock	3-point WSS + BKS latch
Escutcheon	S&B
Handle	S&B


A →

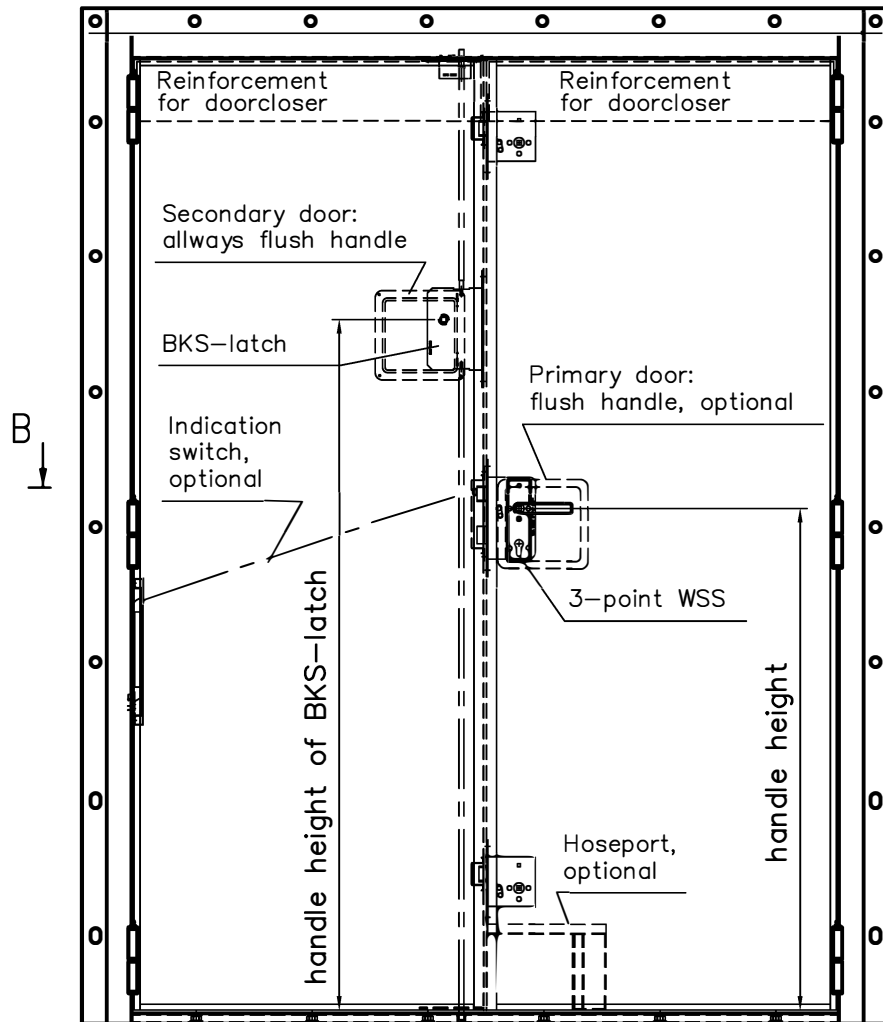


A →

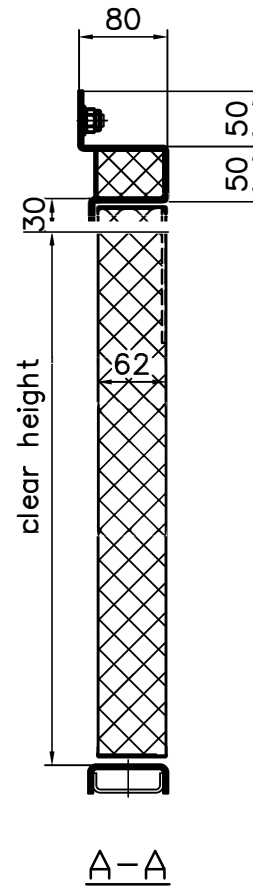


Righthanded door shown

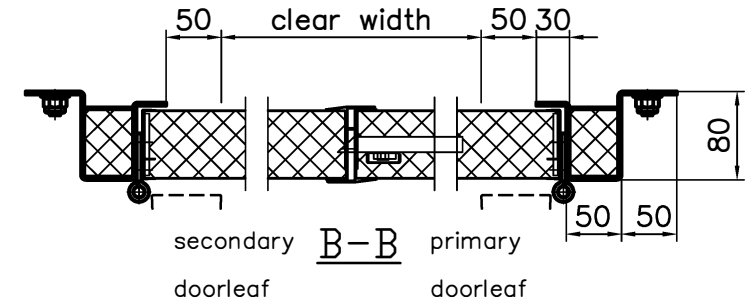

Standard sill profiles

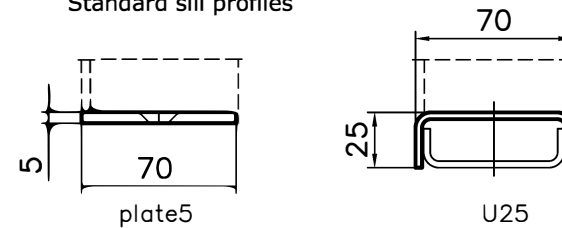

Standard sill profiles for doors with gasket

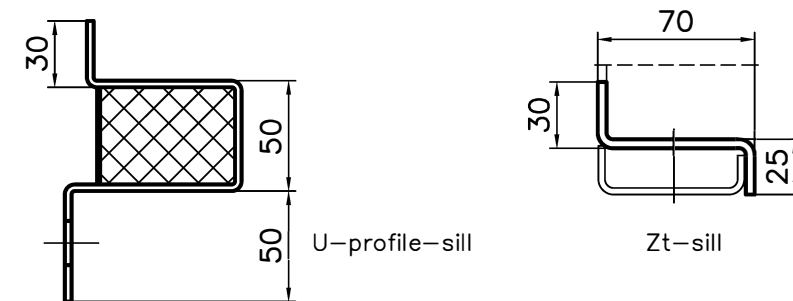

**PARMARINE OY LTD**

FIN-79100 Leppävirta  
Tel.+358 17 570211