
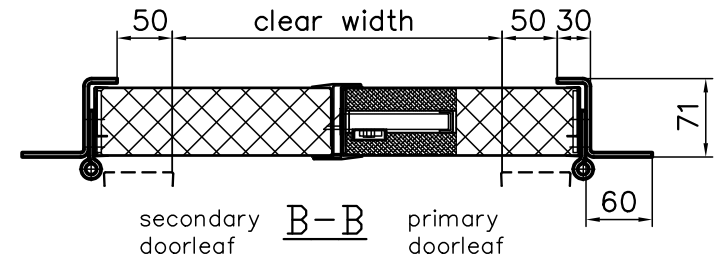
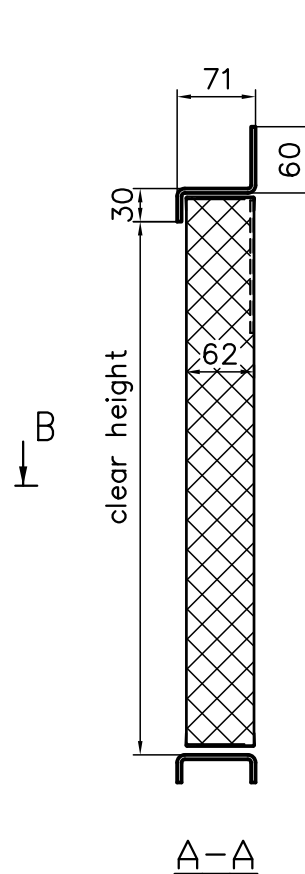



HINGED DOORS, DOUBLE-LEAF, frame fastening by welding

Thickness of the doorleaf	Fire class
62mm	A60


Lock	3-point WSS + BKS latch
Escutcheon	S&B
Handle	S&B

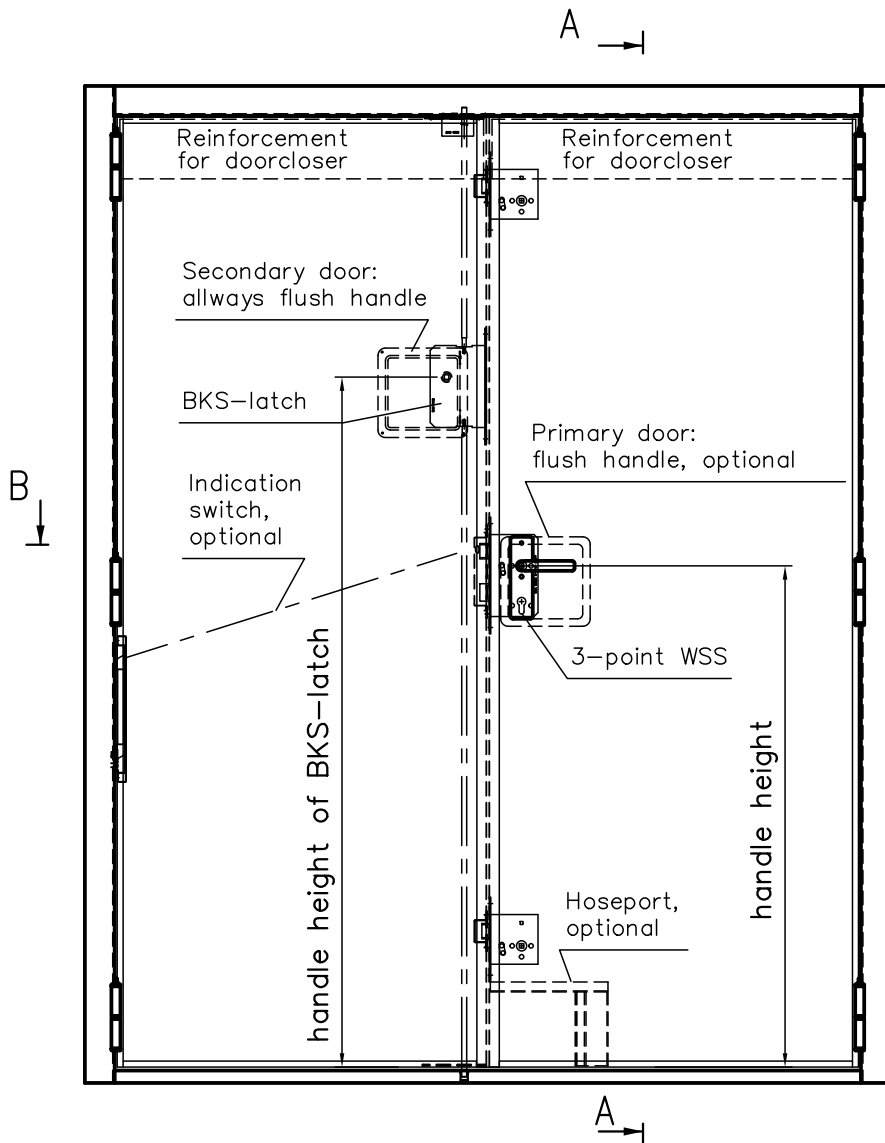

Standard sill profiles

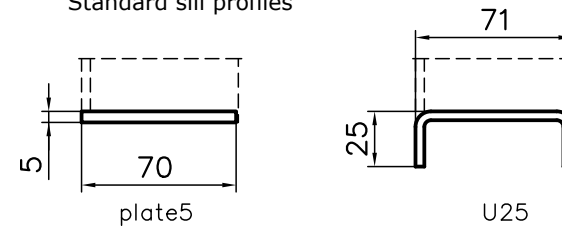

Standard sill profiles for doors with gasket

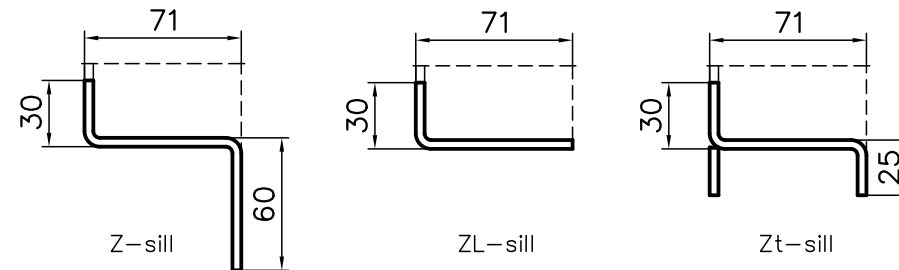

Righthanded door shown

PARMARINE OY LTD
 FIN-79100 Leppävirta
 Tel.+358 17 570211, Fax+358 17 5542725