


HINGED DOORS, SINGLE-LEAF, screw fastening frame U-profile



Thickness of the doorleaf	Fire class
62mm	A60

Lock	3-point WSS + BKS latch
Escutcheon	S&B
Handle	S&B


A →

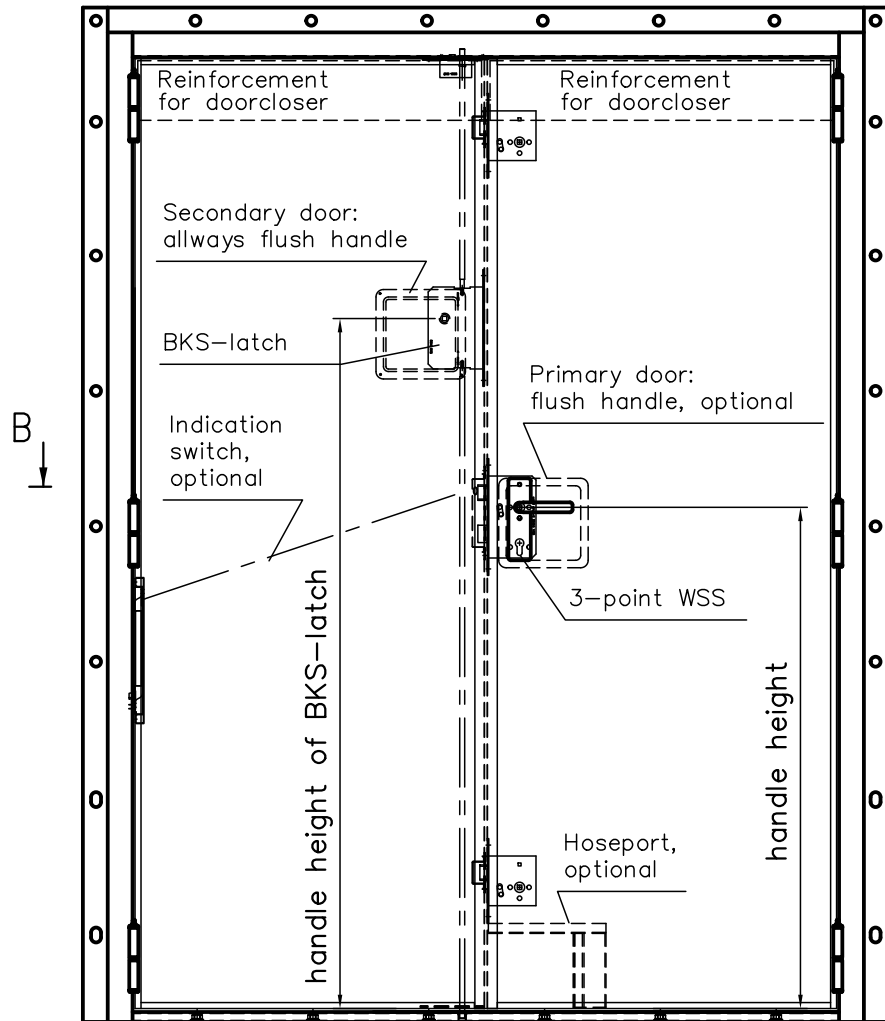


A →

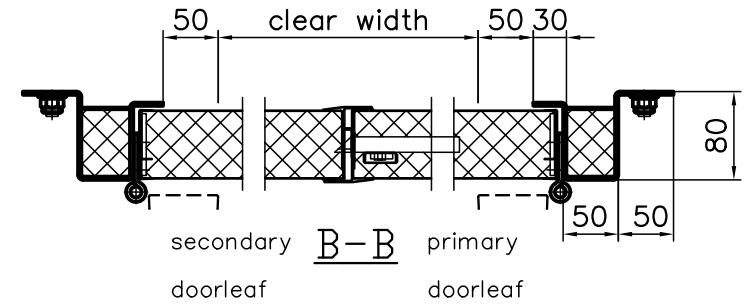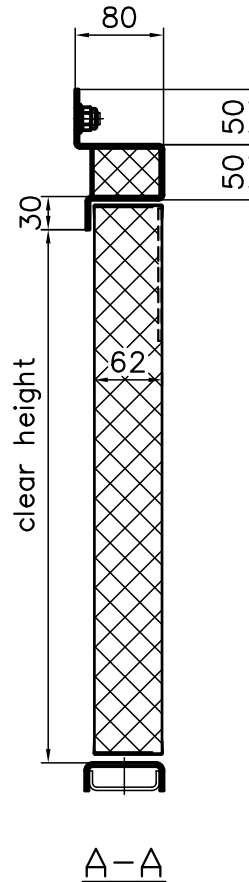

Standard sill profiles

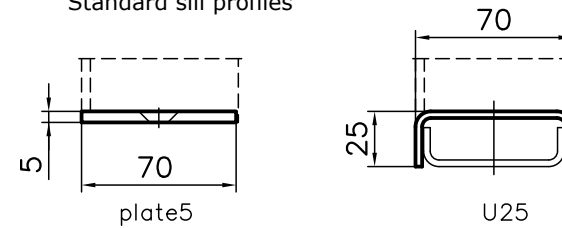

Standard sill profiles for doors with gasket

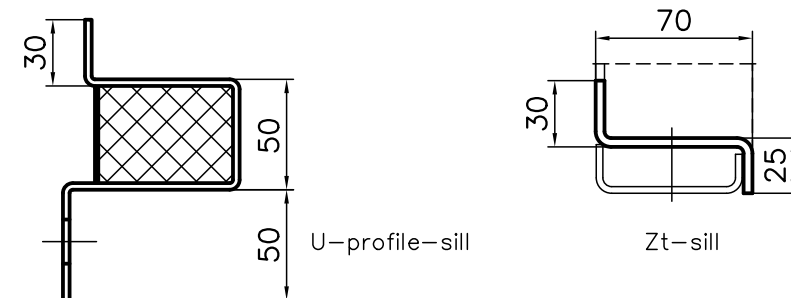

Righthanded door shown

PARMARINE OY LTD

FIN-79100 Leppävirta

Tel.+358 17 570211, Fax+358 17 5542725