
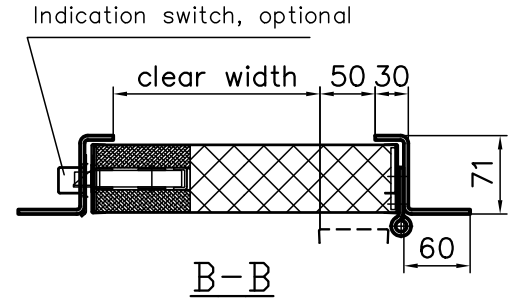
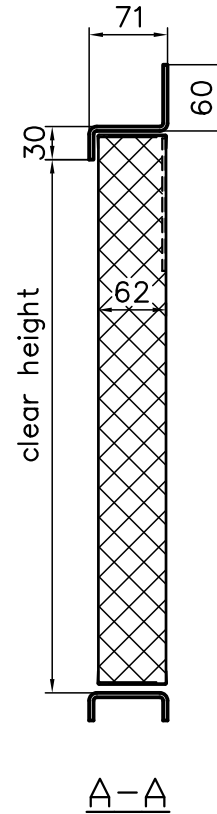



# HINGED DOORS, SINGLE-LEAF, frame fastening by welding

Thickness of the doorleaf	Fire class
62mm	A60


Lock	WSS
Escutcheon	S&B
Handle	S&B

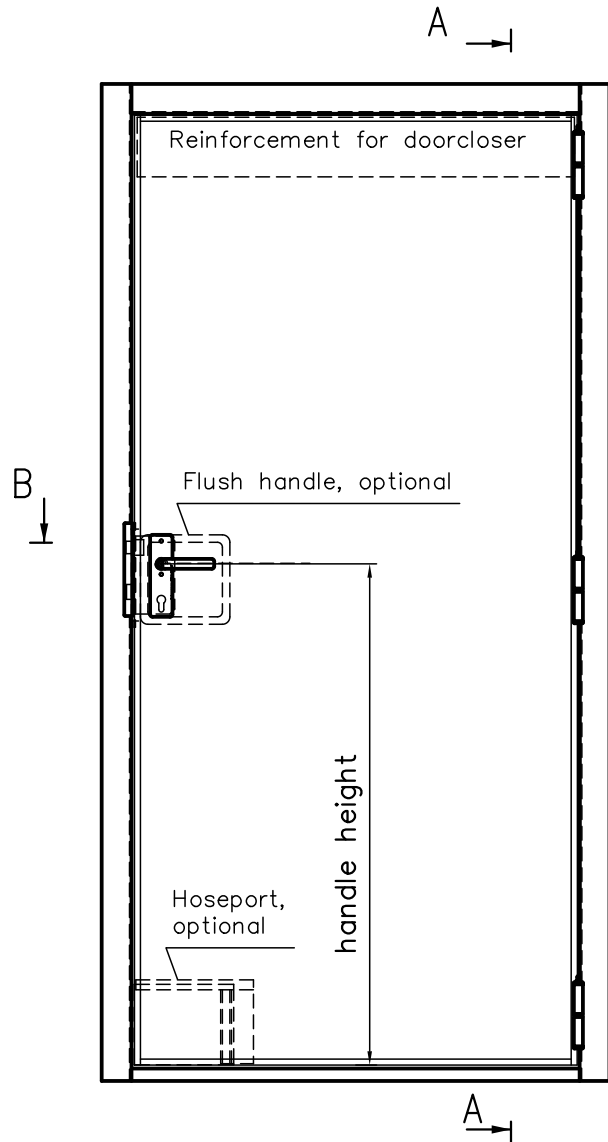

Standard sill profiles

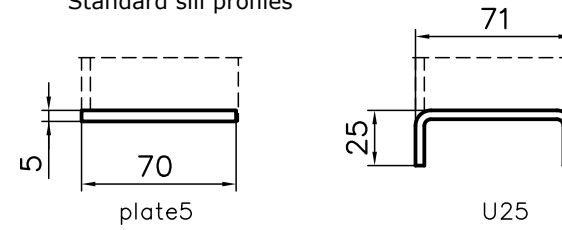

Standard sill profiles for doors with gasket

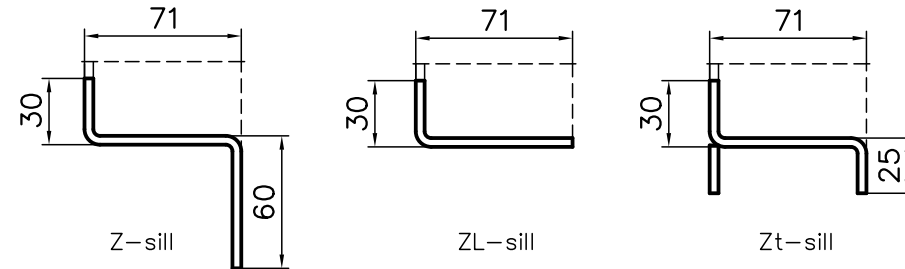

Righthanded door shown

**PARMARINE OY LTD**

FIN-79100 Leppävirta  
Tel.+358 17 570211, Fax+358 17 5542725