
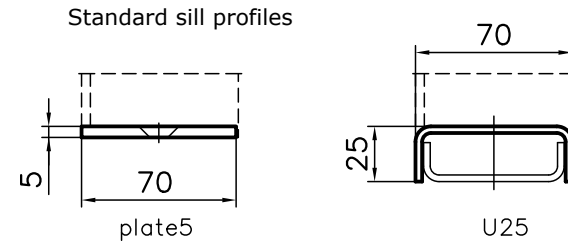
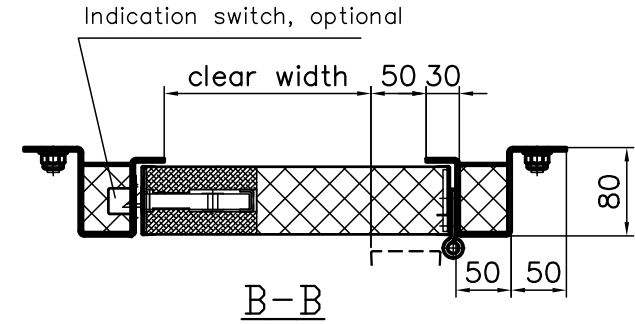
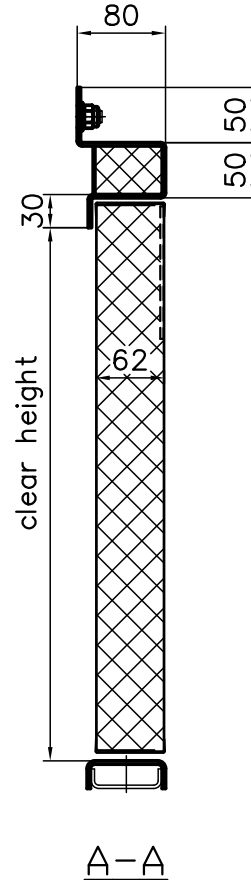



HINGED DOORS, SINGLE-LEAF, screw fastening frame U-profile

Thickness of the doorleaf	Fire class
62mm	A60

Lock	WSS
Escutcheon	S&B
Handle	S&B

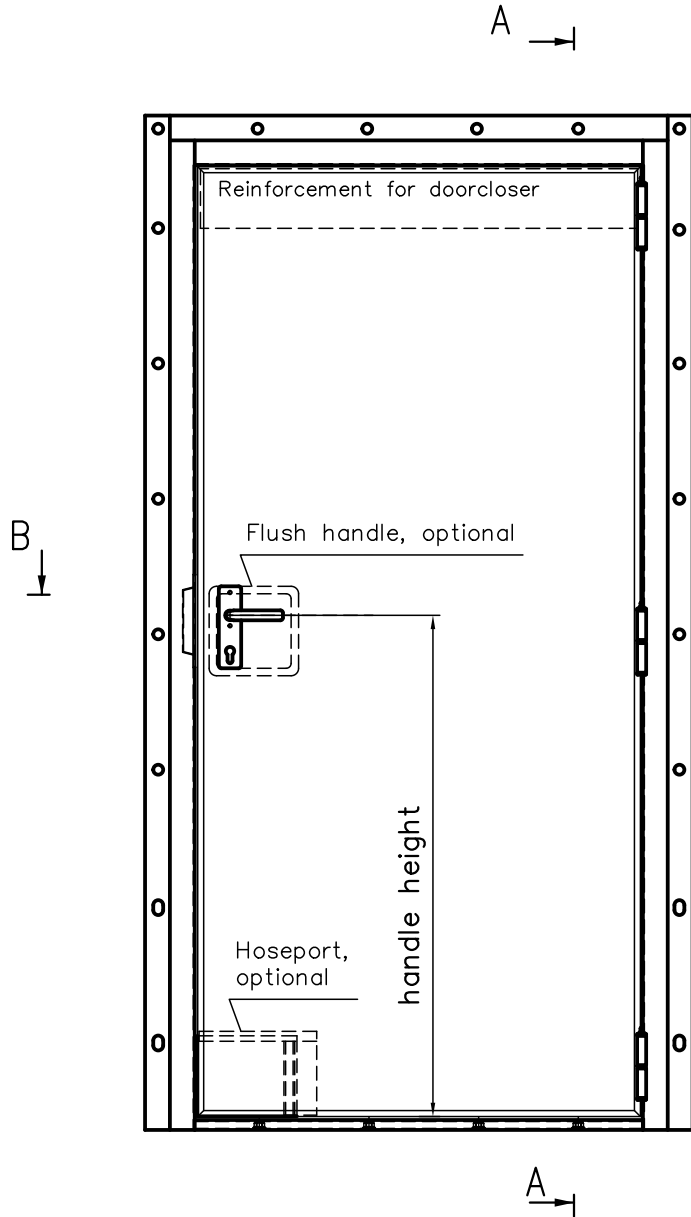

Standard sill profiles for doors with gasket

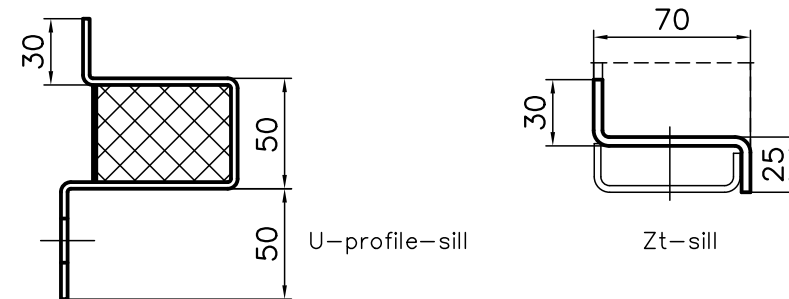

Righthanded door shown

PARMARINE OY LTD

FIN-79100 Leppävirta
Tel.+358 17 570211, Fax+358 17 5542725